

THE GENERATION 3.1



FEATURES





Alu-CabTM

ULTIMATE OVERLAND PRODUCTS

GENERATION 3.1 TENT UPDATES

3D BREATHABLE MESH

3D breathable mesh under the mattress that sits on top of the closed cell insulating foam, we have done this to further assist with condensation

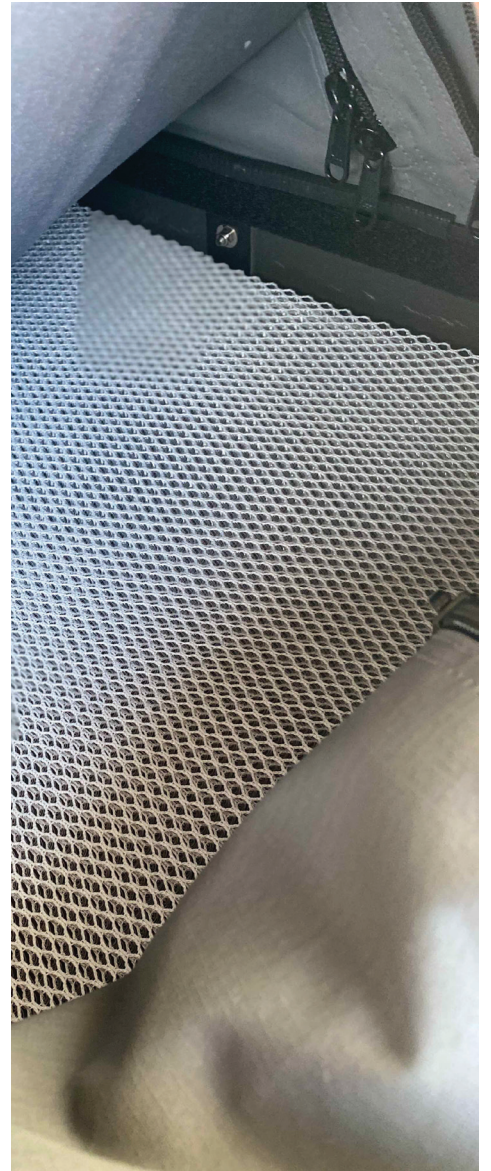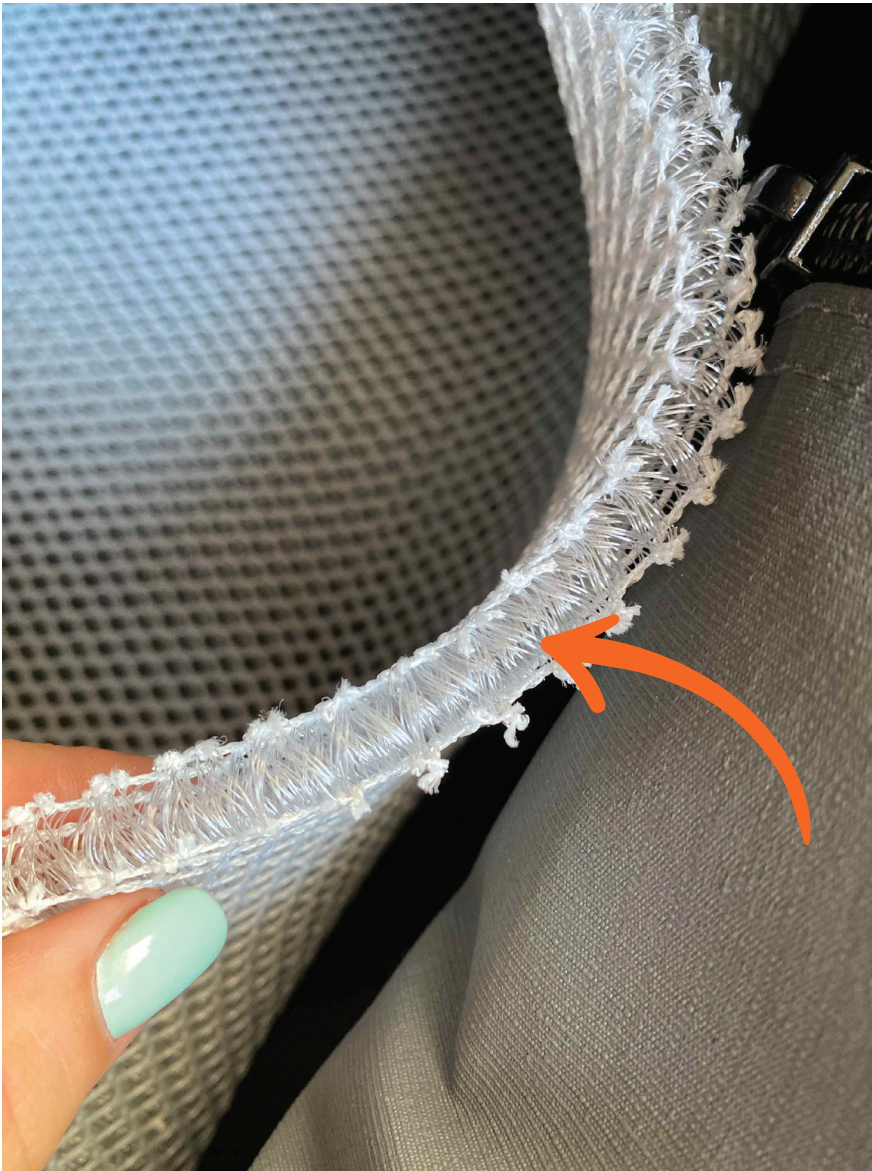

Base insulation is removable.

GENERATION 3.1 TENT UPDATES

AIR VENT

There is now a raised air vent in the back canvas.
This is to help reduce condensation.




Can be zipped open
from the inside

GENERATION 3.1 TENT UPDATES

SINGLE ZIP OPENING DOORS

We have introduced single zip opening doors and this makes it that much more comfortable and easier to use.

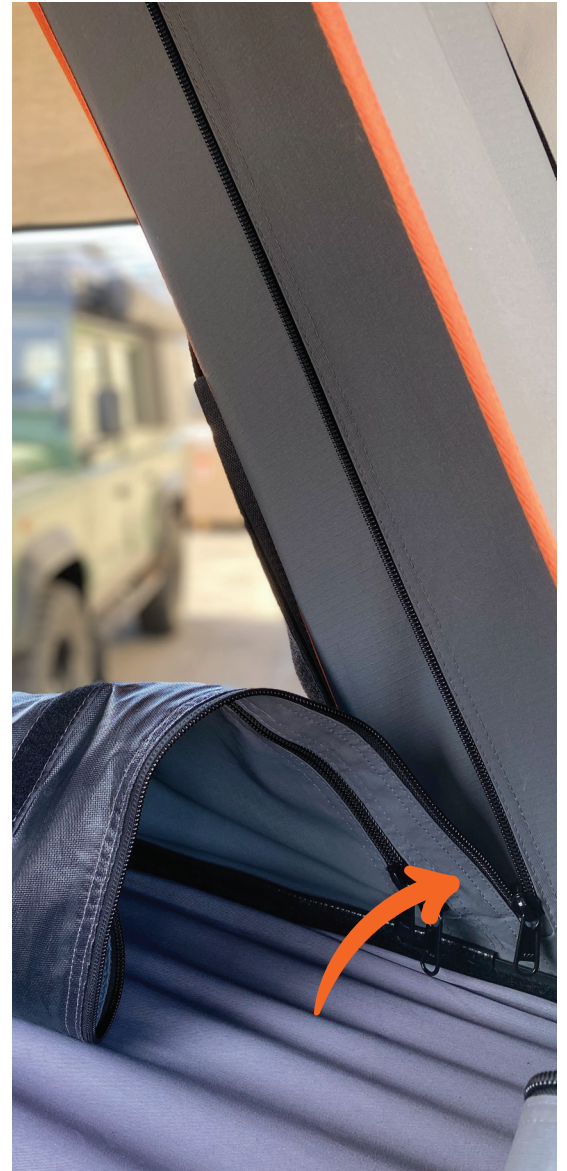

GENERATION 3.1 TENT UPDATES

ZIPPABLE BACK AWNING

The back awning can zip up and stay rolled away along with the rain cover. This allows for quicker opening and makes it far easier to set up the tent, as no spring poles are necessary. The awning only needs to be deployed when weather dictates.



GENERATION 3.1 TENT UPDATES

IMPROVED SPRING POLE EYELETS

New stainless steel eyelets for the spring poles.



GENERATION 3.1 TENT UPDATES

RAIN COVER STANDARD FEATURE

The side rain cover now comes as a standard part of the tent.




You can fit it to either the left- or right-hand side of your tent. The cover then becomes a permanent part of the tent and is easy to be rolled up and tucked out of the way.

The rain cover is also secured to the gas strut.

GENERATION 3.1 TENT UPDATES

RAIN COVER STANDARD FEATURE

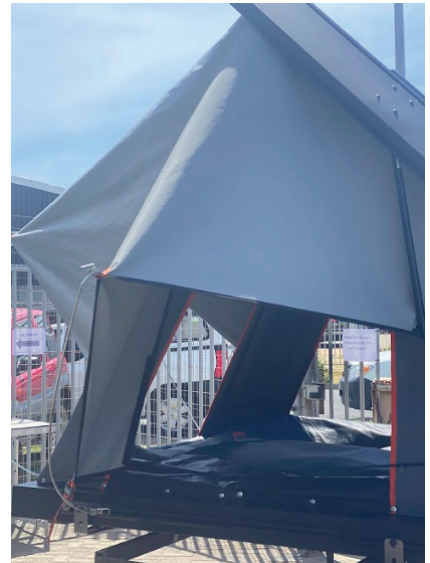

The velcro to attach to the wall of the tent is on each side, so it can work on either the left- or right-hand side.

GENERATION 3.1 TENT UPDATES

CARGO RAILS EXTENDED

Additional cargo rails have been added to the front of the tent, This creates more room and additional options for fitments to the roof.



GENERATION 3.1 TENT UPDATES

TELESCOPIC LADDER

The new telescopic spec-built ladder with stairs that are broad and angled making it far more comfortable to climb into the tent barefoot.



The ladder is also adjustable allowing for various fitment heights.